

ENVIRONMENTAL PRODUCT DECLARATION

In accordance with EN 15804 and ISO 14025

**Blue Acoustic MA (DF)
Activ´Air® 12,5 mm**

**Blue Acoustic impregnated
MAI (DFH2)
Activ´Air® 12,5 mm**

Date of issue: June 2017
Valid until: June 2022



The **environmental impacts** of this product have been assessed over its **whole life cycle**. Its Environmental Product Declaration has been verified by an **independent third party**.

N° VERIFICATION

3013EPD-17-0220



1. General information

Manufacturer: Saint-Gobain Construction Products CZ, division Rigips

Počernická 272/96, 108 03 Prague 10, Czech Republic, IČ: 25029673, DIČ: CZ25029673

About company: International company, enterprising in 64 countries, part of Saint-Gobain group, more than 190 000 employees. Subject of enterprise of Rigips division is to produce and sell plasterboards and its accessories for drywall constructions, acoustic ceiling systems, plasters and providing technical support for marketed solutions.

Programme used: National Eco-labelling Program. For more information see www.cenia.cz

EPD registration/declaration number: 3013EPD-17-0220

PCR identification: EN 15804 Sustainability of construction works – Environmental product declarations (Core rules for the product category of construction products).

Additional rules applied: Saint-Gobain Methodological Guide for Construction products April 2013. The rules in this document have been applied only where guidance is not available in EN 15804.

Product/product family name and manufacturer represented: Blue acoustic board MA (DF) Activ'Air® / Blue acoustic board impregnated MAI (DFH2) Activ'Air® manufactured by Saint-Gobain Construction Products CZ a.s., division Rigips in Melnik- Horni Pocaply.

Declaration verified/issued: 08.06.2017

Valid until: 07.06.2022

Owner of the declaration: Saint-Gobain Construction Products CZ a.s., division Rigips, Horni Pocaply, 254, 277 03 Horni Pocaply, Czech Republic.

EPD prepared by: Lubos Nobilis, ECO trend s.r.o., Na Dolinach 128/36, 140 00 Prague 4

Scope: The LCA is based on 2015 production data for Melnik - Horni Pocaply manufacturing site in Czech Republic for 12.5mm Blue acoustic board MA (DF) Activ'Air® / Blue acoustic board impregnated MAI (DFH2) Activ'Air®. This EPD covers information modules A1 to C4 (cradle to grave) as defined in EN 15804:2012 for 12.5 mm Blue acoustic board MA (DF) Activ'Air® / Blue acoustic board impregnated MAI (DFH2) Activ'Air® Plasterboard sold and used in Czech Republic, Slovakia, Germany, Switzerland, France, Turkey.

The functional unit is 1m2 of installed 12.5 mm thick Blue Acoustic Plasterboard.

CEN standard EN 15804 serves as the core PCR^a

Independent verification of the declaration, according to EN ISO 14025:2010

Internal

External

Third party verifier^b:

Mgr. Barbora Vlasatá

Building Research Institute – Certification Company Ltd.

Head of Certification Body for EPD

Pražská 16, 102 21 Praha 10 – Hostivař

Czech Republic

^a **Product Category Rules**

^b **Optional for business-to-business communication; mandatory for business to consumer communication (see EN ISO 14025:2010, 9.4)**



According to EN 15804, EPD of construction products may not be comparable if they do not comply with this standard. According to ISO 21930, EPD might not be comparable if they are from different programmes.

2. Product description



2.1 Product description

Rigips **Blue acoustic board MA (DF) ActivAir®** and **Blue acoustic board impregnated MAI (DFH2) ActivAir®** are gypsum plasterboards type DF and DFH2 according to EN 520.

Rigips Blue acoustic boards are plasterboards with a special core with higher density which is encased in a blue paper liner. It provides significantly improved airborne sound insulation and fire protection properties compared to a standard gypsum plasterboard. It shrinks less during a fire and sustains its basic properties better due to a higher density core reinforced with glass fibres, minerals and other additives for dimensional stability and improved core cohesion at high temperatures.

Blue acoustic board impregnated MAI (DFH2) ActivAir® is a moisture resistant board. The gypsum core is impregnated with additives that significantly reduce the rate of water absorption.

Rigips Blue acoustic board are manufactured with technology ActivAir®. ActivAir® plasterboards improve indoor air quality by using a unique technology to remove formaldehydes from the air and convert them into safe, inert compounds that once captured in the board cannot be released back into the air.

Rigips Blue acoustic board MA (DF) ActivAir® and Blue acoustic board impregnated MAI (DFH2) ActivAir® are a 12,5 mm thick boards, available in 1250 mm width.

For further details of the Rigips boards properties please see technical data sheet available from www.rigips.cz

2.2 Description of use

Rigips **Blue acoustic boards MA (DF) ActivAir®** and **MAI (DFH2) ActivAir®** are designed for use in partition, lining and ceiling systems where greater levels of sound insulation, fire protection and improve indoor air quality are required.

Blue acoustic board impregnated MAI (DFH2) ActivAir® can be used in addition in areas of intermittent high humidity as bathrooms.

Installation according to Rigips installation instructions.

2.3 Placing on the market

UN CPC Code: 37530 Articles of plaster or of compositions based on plaster


2.4 Delivery Status

The EPD refers to 12.5 mm thick Rigips Blue Acoustic Plasterboard.

2.5 Base materials/ancillary materials

Material	Part (%)	Quantity used in product (kg/m ²)	Substances of Very High Concern
Gypsum (from flue gas desulfurization)	88,04	10,57	No Substance of Very High Concern
Lignite ash	8,29	0,99	
Glass fibre	2,62	0,31	
Additives	1,04	0,13	
Total	100,00	12,00	

2.6 Manufacture

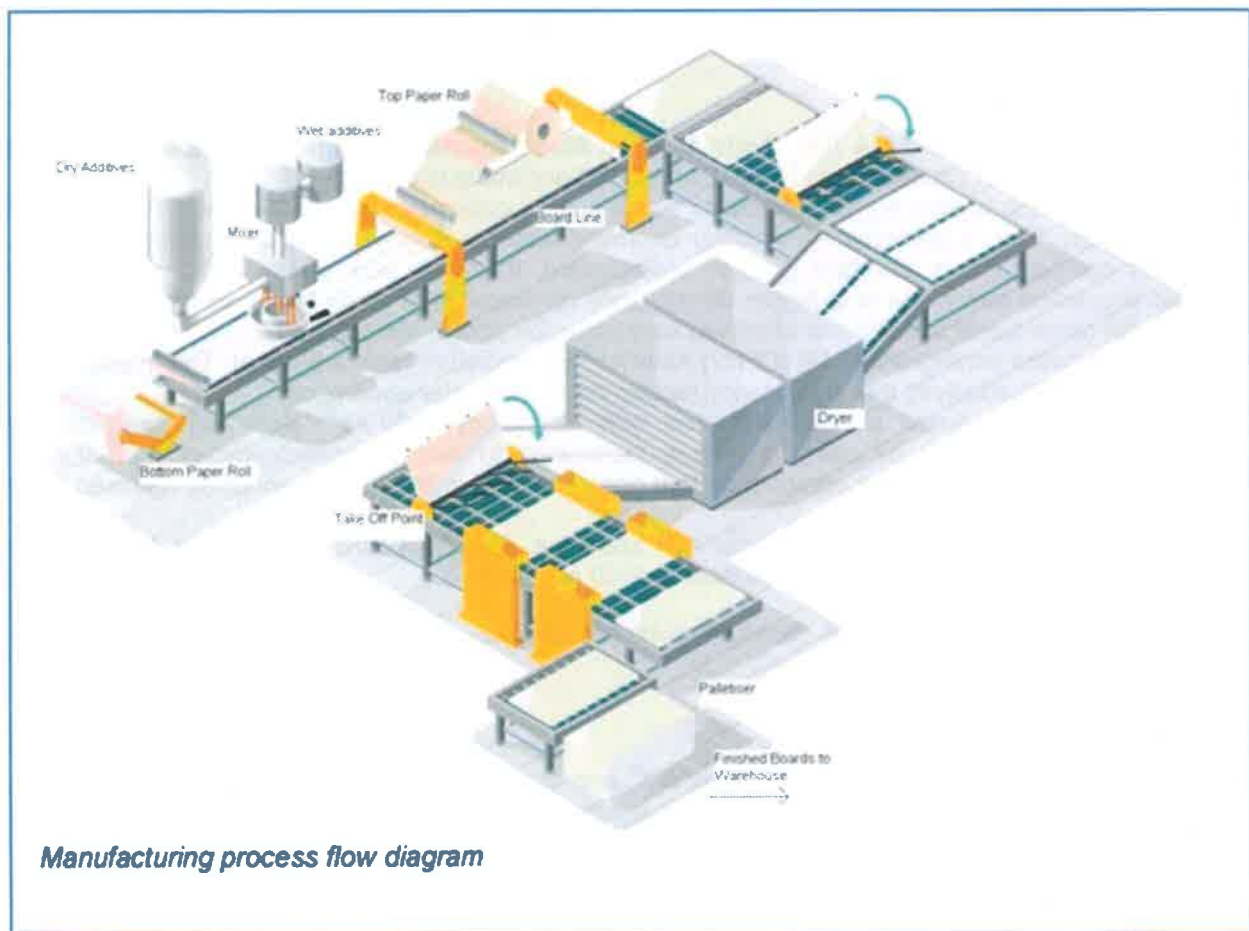

Plasterboard is made up of a gypsum core, mixed with wet and dry additives and encased within Paper or Glass fibre liner.

2.7 Packaging

Wooden pallets are used for packaging for the distribution and transportation of plasterboards.

2.8 Reference service life

The Reference Service Life (RSL) of the Gypsum product is considered to be 50 years. In accordance with the Plasterboard is expected to last 50 years in a building with no maintenance, before be removed and replaced as part of refurbishment work. The Saint Gobain Methodological Guide for Construction Products sets out 50 years as the standard life expectancy of the board, to be used as the Reference Service Life in all Saint-Gobain Plasterboard EPD's, unless otherwise provided by an alternative PCR.

3. LCA calculation information

DECLARED UNIT	1m ² of non-installed board weighing 12 kg/m ²
SYSTEM BOUNDARIES	Cradle to Grave (RSL 50 years): Mandatory stages A1 – 3, B1 – 7, C1 – 4.
ESTIMATES AND ASSUMPTIONS	<p>The electricity production module is country specific – (Czech Republic 2013, EU 2013).</p> <p>Some additives, which exactly data gaps for a unit process, in total amount of weight 0,7 %, were substituted by similar substances in the model.</p>
CUT-OFF RULES	<p>All inputs and outputs to a (unit) process for which data is available are included in the calculation.</p> <p>In case of insufficient input data or data gaps for a unit process, the cut-off criteria is set at 1 % of renewable and non-renewable primary energy usage and 1 % of the total mass input of that unit process.</p>
BACKGROUND DATA	Background data used is of less than 10 years old wherever possible. Data modules are used from the Ecoinvent database.
DATA QUALITY	<p>Specific data has been used for the processes Saint-Gobain Construction products CZ a.s., division Rigips has influence over.</p> <p>Generic data has been used for the processes the company cannot influence, where present data modules have been used.</p>
PERIOD UNDER REVIEW	The data are representative of the manufacturing processes of 2015.
ALLOCATIONS	<p>Production data has been calculated on a mass and square basis.</p> <p>The main input – gypsum from flue gas desulfurization was modelled on basis of economic value of thermal power plant operations.</p>
COMPARABILITY	<p>A comparison or an evaluation of EPD data is only possible where EN 15804 has been followed and the same building context and product specific characteristics of performance are taken into account and the same stages have been included in the system boundary.</p> <p>According to EN 15804, EPD of construction products may not be comparable if they do not comply with this standard. According to ISO 21930, EPD might not be comparable if they are from different programs.</p>
GEOGRAPHICAL COVERAGE	Scope includes manufacture and sale in Czech Republic, and sales in Slovakia, German, Switzerland, France and Turkey.

4. Life cycle stages



Flow diagram of the Life Cycle

Product stage, A1-A3

Description of the stage:

The product stage of the plasterboard products is subdivided into three modules: A1, A2 and A3 respectively "raw material supply", "transport" and "manufacturing".

A1, raw material supply

This includes raw material extraction and processing, processing of secondary material input (e.g. recycling processes) and energy.

A2, transport to the manufacturer

Raw materials are transported to the manufacturing site; this includes modelling of road, boat and or train transport (with average values) for each raw material.

A3, manufacturing

The module includes manufacture of product and packaging material. Waste processing up to the end-of-waste state or disposal of final residues during the product stage is also included.

Construction process stage, A4-A5

Description of the stage:

The construction process stage is divided into two modules: A4, transport to the building site and A5, installation of the product in the building.

A4, transport to the building site

The table below quantifies the parameters for transporting the product from production gate to the building site. The distance quoted is a weighted average, calculated using customer information and the quantity of product transported.

Transport to the building site:

PARAMETER	VALUE
Fuel type and consumption of vehicle or vehicle type used for transport e.g. long distance truck, boat, etc.	Average truck trailer with a 28t payload, diesel consumption 0,0356 kg/tkm, EURO IV class
Distance	130 km (weighted average distance for 2015) 100 % of the capacity in volume 30 % of empty returns
Capacity utilisation (including empty returns)	Due to the shape and nature of the plasterboard product it is easy to stack and therefore fits efficiently into the shape and space of a lorry container.
Bulk density of transported products	> 840 kg/m ³
Volume capacity utilisation factor	1 (by default)

A5, installation into the building

The accompanying table quantifies the parameters for installing the product at the building site. All installation materials and their waste processing are included.

Installation in the building

PARAMETER	VALUE
Ancillary materials for installation (specified by material)	0,33 kg Jointing compound, 1,23 m jointing tape (glass fibre), 8 screws (3,5x25 mm)
Water use	0,000165 m ³
Other resource use	None
Qualitative description of energy type (regional mix) and consumption during the installation process	None modelled
Wastage of materials on the building site before waste processing, generated by the product's installation (specified by type)	5 % (Gypsum product, jointing compound and jointing tape. It is assumed that there is no wastage of screws) 0,535 (kg) scrap plasterboard, and 0,0165 (kg) scrap Jointing Compound
Output materials (specified by type) as results of waste processing at the building site e.g. of collection for recycling, for energy recovering, disposal (specified by route)	Packaging wastes (wooden pallets, PE film) are modelled as consistent with CZ waste management statistic. Gypsum waste is 14 % recycled and 86% landfilled Jointing tape waste is 100% landfilled
Direct emissions to ambient air, soil, water	None

These information modules also include all impacts and aspects related to any losses during this construction process stage (i.e. production, transport, and waste processing and disposal of the lost products and materials).

Use stage (excluding potential savings), B1-B7

Description of the stage:

The use stage is divided into the following:

B1, use or application of the installed product;

B2, maintenance;

B3, repair;

B4, replacement;

B5, refurbishment;

B6, operational energy use;

B7, operational water use;

Description of scenarios and additional technical information:

The product has a reference service life of 50 years. This assumes that the product will last in situ with no requirements for maintenance, repair, replacement or refurbishment throughout this period. Rigips Glasroc is a passive building product; therefore it has no impact at this stage.

End-of-life stage C1-C4

Description of the stage:

The end-of-life stage includes:

C1, de-construction, demolition:

C2, transport to waste processing;

C3, waste processing for reuse, recovery and/or recycling;

C4, disposal; including provision and all transport, provision of all materials, products and related energy and water use.

The Gypsum product is on average 86 % landfilled and 14 % recycled at end of life

End-of-life:

PARAMETER	VALUE/DESCRIPTION
Collection process specified by type	1,73 kg collected separately for recycling per 1 m ² 10,63 Kg collected with mixed construction waste per 1 m ² Approximately 10% of Gypsum waste is collected in Czech and transported by truck for landfill and recycling.
Recovery system specified by type	14% recovered into other plasterboard products 1,73 kg for reuse
Disposal specified by type	86% landfilled, 14 % Recycled 10,63 kg for final deposition
Assumptions for scenario development (e.g. transportation)	Average truck trailer with a 28t payload, diesel consumption 0,0356 kg/tkm, EURO IV class 180 km for recycling part 50 km for landfilling Units as appropriate

5. LCA results – Blue Acoustic / 12.5mm

Description of the system boundary (X = included in the LCA, MND = Module Not Declared)

PRODUCT STAGE			CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE			BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY	
Raw material supply	Transport	Manufacturing	Transport	Construction-Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-recovery
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MND


ENVIRONMENTAL IMPACTS: per 1 m² of 12.5 mm Rigips Blue Acoustic


Parameters per Declared unit of 1 m² installed 12.5 mm plasterboard

Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling			
	A1 Raw material	A2 Transport	A3 Manufacturing	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Destruction /demolition		C2 Transport	C3 Waste processing	C4 Disposal
5,06E+00	2,21E-02	1,22E-01	0	0	0	0	0	0	0	0	0	0	0	8,90E-03	5,50E-03	6,07E-02	MND
<p>The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas, carbon dioxide, which is assigned a value of 1.</p>																	
6,52E-07	1,53E-09	5,80E-09	0	0	0	0	0	0	0	0	0	0	0	6,18E-10	4,03E-10	7,02E-09	MND
<p>Ozone depletion (ODP) kg CFC 11 equiv/FU</p> <p>Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halons), which break down when they reach the stratosphere and then catalytically destroy ozone molecules.</p>																	
1,60E-02	8,80E-05	7,91E-04	0	0	0	0	0	0	0	0	0	0	0	3,55E-05	3,42E-05	4,14E-04	MND
<p>Acidification potential (AP) kg SO₂ equiv/FU</p> <p>Acid depositions have negative impacts on natural ecosystems and the man-made environment incl. buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.</p>																	
1,28E-02	2,08E-05	2,71E-04	0	0	0	0	0	0	0	0	0	0	0	8,41E-06	1,93E-05	8,35E-05	MND
<p>Eutrophication potential (EP) kg (PO₄)₃-equiv/FU</p> <p>Excessive enrichment of waters and continental surfaces with nutrients, and the associated adverse biological effects.</p>																	
7,83E-04	2,97E-06	4,02E-05	0	0	0	0	0	0	0	0	0	0	0	1,20E-06	8,08E-07	2,05E-05	MND
<p>Photochemical ozone creation (POCP) kg Ethylene equiv/FU</p> <p>The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.</p>																	
2,18E-06	5,58E-08	4,74E-07	0	0	0	0	0	0	0	0	0	0	0	2,25E-08	2,30E-09	7,22E-08	MND
<p>Abiotic depletion potential for non-fossil resources (ADP-elements) kg Sb equiv/FU</p>																	
7,30E+01	3,26E-01	1,59E+00	0	0	0	0	0	0	0	0	0	0	0	1,32E-01	8,12E-02	1,62E+00	MND
<p>Abiotic depletion potential for fossil resources (ADP-fossil fuels) MJ/FU</p> <p>Consumption of non-renewable resources, thereby lowering their availability for future generations.</p>																	

WASTE CATEGORIES: per 1 m² of 12,5 mm Rigips Blue Acoustic

Parameters per Declared unit of 1 m² installed 12.5 mm plasterboard

 **Hazardous waste disposed**
kg / FU

 **Non-hazardous waste disposed** - kg / FU

 **Radioactive waste disposed**
kg / FU

Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling	
	A3 Manufacturing	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction /demolition	C2 Transport	C3 Waste processing		C4 Disposal
3,22E-02	9,90E-06	1,67E-03	0	0	0	0	0	0	0	0	0	6,71E-06	1,16E-07	0,00E+00	MND
2,26E-01	6,62E-05	1,82E+00	0	0	0	0	0	0	0	0	0	2,02E+05	6,05E-06	1,06E+01	MND
2,12E-05	7,26E-06	8,67E-06	0	0	0	0	0	0	0	0	0	5,15E-06	8,12E-08	0,00E+00	MND